



CAT 378

Classic Advanced Tweeter

Ø 94mm, 8Ω

SPECIFICATIONS

General Data

Overall Dimensions	DxH	94mm(3.70")x59mm(2.32")
Nominal Power Handling (DIN)	P	200W
Transient Power 10ms		1000W
Sensitivity 1W/1M		93dB SPL
Frequency Response		1,800-22,000 Hz
Cone/Dome Material		Acuflex™ hand coated soft dome
Net Weight	Kg	0.555

Electrical Data

Nominal Impedance	Z	8Ω
DC Resistance	Re	5.2Ω
Voice Coil Inductance @ 1KHz	LBM	0.09mH

Voice Coil and Magnet Parameters

Voice Coil Diameter	DIA	28mm
Voice Coil Height		2.7mm
HE Magnetic Gap Height	HE	2.5mm
Max. Linear Excursion	X	
Voice Coil Former		Aluminum
Voice Coil Wire		Hexatech™ Aluminum
Number Of Layers		2
Magnet System Type		Ferrite vented
B Flux Density	B	1.5 T
BL Product	BXL	3.5 N.A


T-S Parameters

Suspension Compliance	Cms		
Mechanical Q Factor	Qms		
Electrical Q Factor	Qes		
Total Q Factor	Qts		
Mechanical Resistance	Rms		
Moving Mass	Mms	0.44 g	
Eq. Cas Air Load (liters)	VAS		
Resonant Frequency	Fs	700 Hz	
Effective Piston Area	SD	6.0 cm ²	



Features

- * 94mm horn-loading face plate
- * Large Hexatech™ aluminum voice coil
- * Replaceable Acuflex™ dome / coil assembly
- * High sensitivity
- * High power handling
- * Sturdy gold plated input tags

Unit Dimension

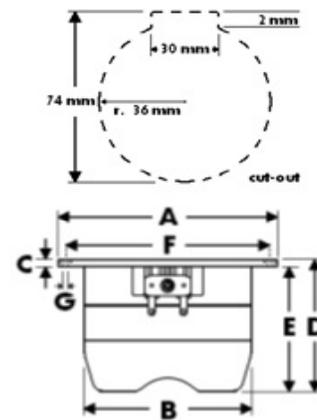

A - Overall diameter	94mm
B - Magnet/Chamber diameter	72mm
C - Flange thickness	4mm
D - Overall height	59mm
E - Magnet/Chamber depth	55mm
F - Mounting holes location diameter	86mm
G - 3 Mounting holes, at 120° interval,	
inner hole diameter	Ø 3.7mm
pocket	h 1mm, Ø 8mm

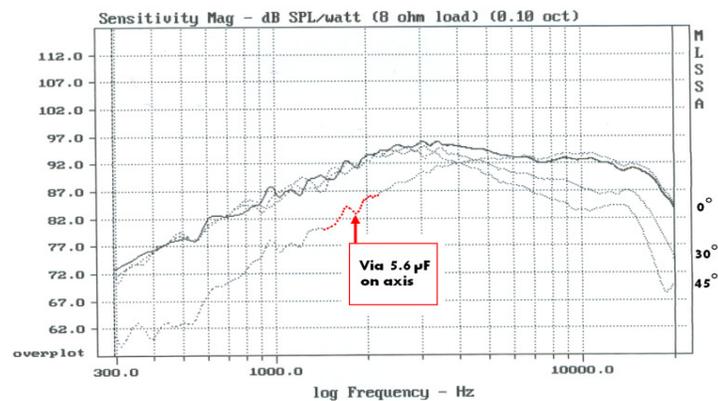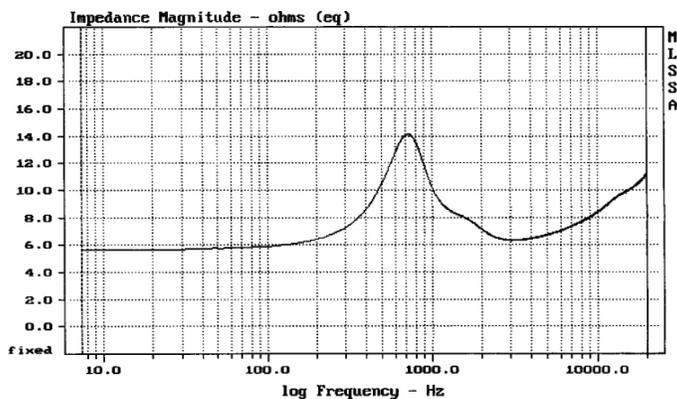

This model replaces former Morel MDT-37 model.

Morel operate policy of continuous product design improvement, consequently specifications are subject to alteration without prior notice.