



## DT-19SU

Order No.: 10.1970

**Price upon request**

### PRODUCTINFOS

**Hi-fi dome tweeter, 50 W, 8  $\Omega$**

- 19 mm soft dome, laminate technology
- Double magnet
- Robust plastic front
- Low cone weight
- Optimum brilliance
- For hi-fi applications of high requirements, especially in 3-way systems

### TECHNICAL SPECIFICATIONS


#### DT-19SU

Impedance (Z)	8 $\Omega$
Frequency range	fx-20,000 Hz
Resonant frequency (fs)	1,500 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	3,000 Hz

**DT-19SU**

Power rating	50 W
Peak music power output	80 W
Sensitivity	91 dB/W/m
Voice coil diameter	Ø 19 mm
Magnet diameter	Ø 55 mm
Mounting cutout	Ø 66 mm
Mounting depth	33 mm
Dimensions	Ø 100 x 33 mm
Outside diameter	Ø 100 mm
Width	Ø 100 mm
Depth	33 mm
Admiss. ambient temp.	0-40 °C
Weight	0.397 kg
Packing unit	1

DT-19SU (10.1970)

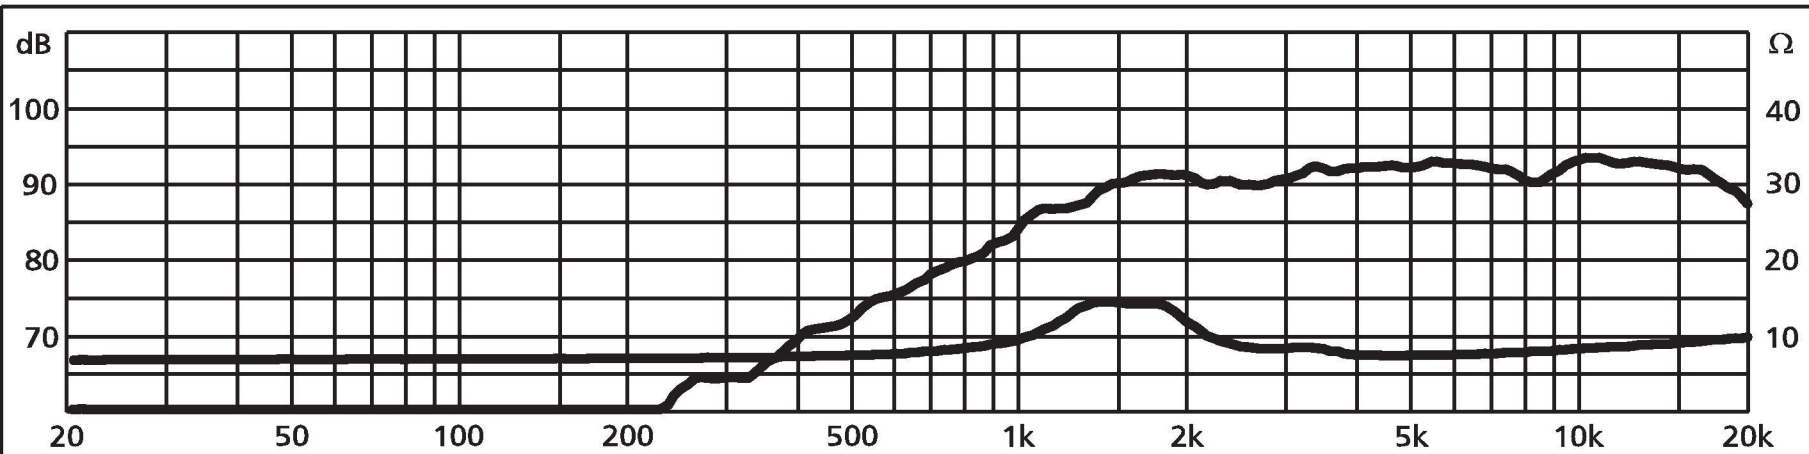

# DT-19SU

