



DT-352NF

Order No.: 0105900

Price upon request

PRODUCTINFOS

Hi-fi dome tweeter, 80 W, 8 Ω

- 25 mm (1") metal dome, finest resolution of the high frequency range
- No ferrofluid in the air gap of the drive system
- Special light metal alloy without resonance behaviour typical for metal
- Double magnet system with drilled pole core
- Damped coupling volume for a low resonant frequency
- For use with a crossover frequency from 1,500 Hz on via 18 dB filter
- Very wide radiation range, goes beyond 25 kHz

HOBBY HiFi 06/2018


“A top price-performance recommendation: With the DT-352NF, MONACOR provides an outstanding dome tweeter which perfectly meets any requirement. Compared with the sound quality, the price is far more attractive than expected.”

TECHNICAL SPECIFICATIONS

DT-352NF

Impedance (Z)	8 Ω
Frequency range	fx-25,000 Hz
Resonant frequency (fs)	800 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	2,000 Hz/1,500 Hz (18 dB)
Power rating (RMS)	80 W
Peak music power output (MAX)	150 W
Sensitivity	91 dB/W/m
Voice coil diameter	\varnothing 25 mm
Magnet diameter	\varnothing 72 mm
Mounting cutout	\varnothing 87 mm
Mounting depth	42 mm
Mounting hole diameter	\varnothing 98 mm
Hole spacing X-axis	69.3 mm
Hole spacing Y-axis	69.3 mm
Dimensions	\varnothing 110 x 46 mm
Outside diameter	\varnothing 110 mm
Width	\varnothing 110 mm
Depth	46 mm
Admiss. ambient temp.	0-40 °C
Weight	0.77 kg
Packing unit	1

DT-352NF (10.5900)

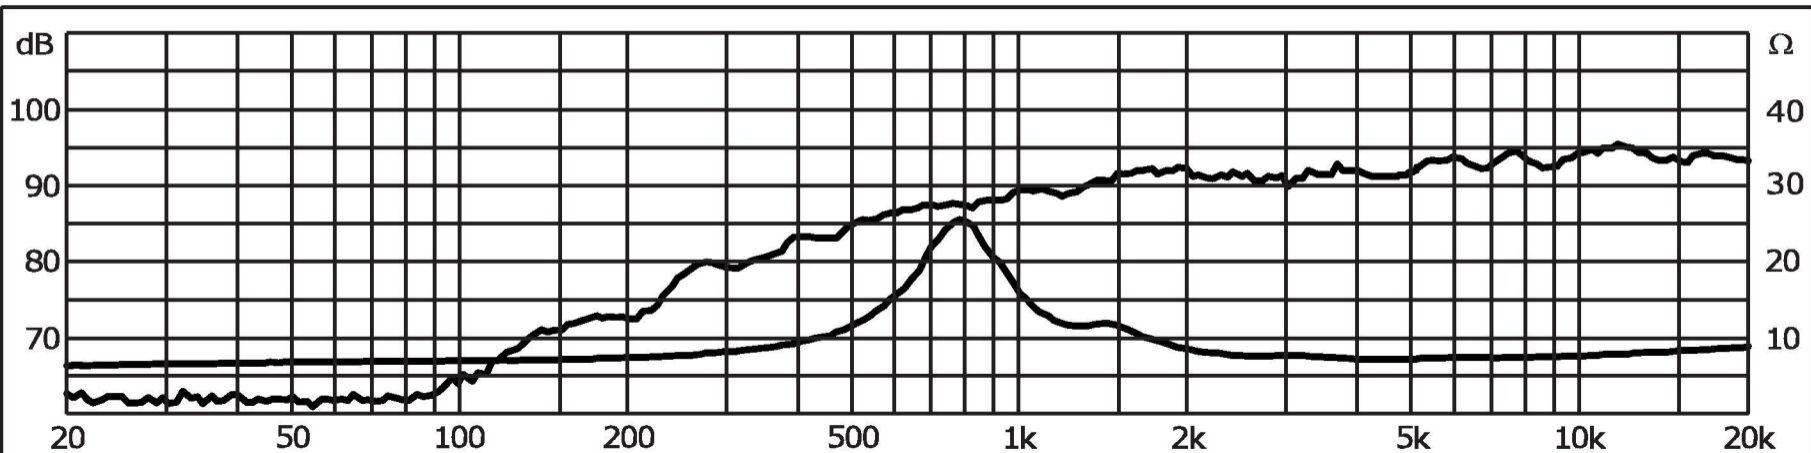

DT-352NF

